

■ 冷媒用継手 製品一覧



T



90°エルボ



45°エルボ



ソケット


45° エルボ

RoHS


(単位mm)

日本工業規格 (J I S B 8607) 準拠


日本銅センター規格 (J C D A 0001) 適合品

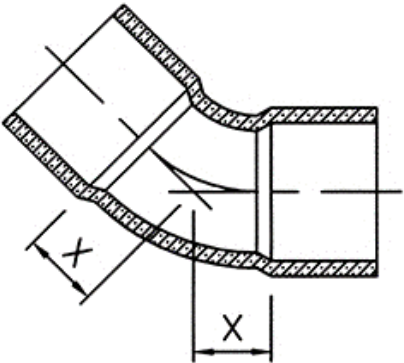

規格	呼び径	X
J C D A	12.7	6.5
	15.88	8
	19.05	8
	22.22	10
	25.4	10
	28.58	12
	31.75	15
	34.92	13
	38.1	16
	41.28	20
	44.45	20
	50.8	22

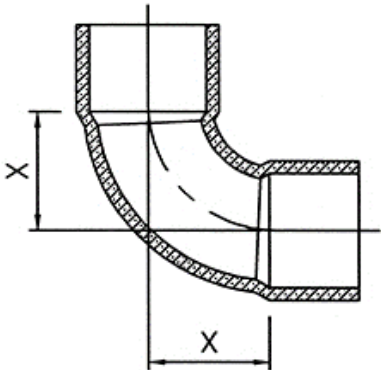


規格	呼び径	X
J C D A	6.35	8
	9.52	11
	12.7	14
	15.88	15
	19.05	19
	22.22	22
	25.4	25
	28.58	28
	31.75	33
	34.92	33
	38.1	38
	41.28	43
	44.45	51
	50.8	58
	53.98	45
	63.5	54
	66.68	50

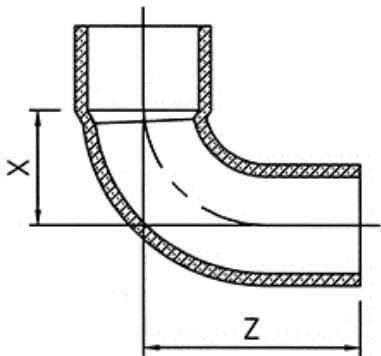

規格	呼び径	X	Z
J C D A	25.4	25	45
	31.75	33	55
	38.1	38	64

(単位mm)


日本工業規格（J I S B 8607）準拠
日本銅センター規格（J C D A 0001）適合品



規格	呼び径	X
J C D A	6.35	1
	9.52	1
	12.7	2
	15.88	2
	19.05	2
	22.22	2
	25.4	2
	28.58	2
	31.75	2
	34.92	2
	38.1	2
	41.28	2
	44.45	3
	50.8	3
	53.98	3

異径ソケット

(単位mm)



規格	呼び径	X
J C D A	9.52 x 6.35	5
	12.7 x 9.52	4
	15.88 x 12.7	6
	19.05 x 9.52	12
	19.05 x 15.88	8
	22.22 x 12.7	13
	22.22 x 15.88	11
	25.4 x 19.05	10
	31.75 x 19.05	14
	38.1 x 31.75	11
	44.45 x 31.75	16
	50.8 x 38.1	18
	50.8 x 44.45	14

T


RoHS

RoHS

は、RoHS指令対応品です。


(単位mm) 日本工業規格 (J I S B 8607) 準拠

日本銅センター規格 (J C D A 0001) 適合品

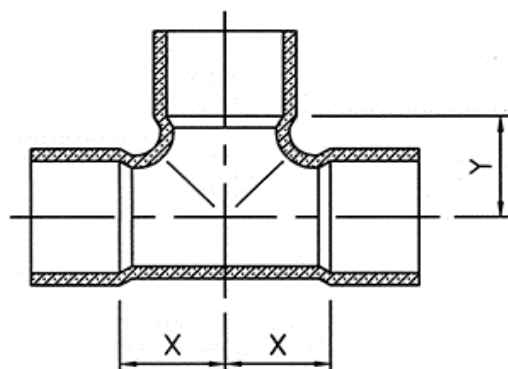

規格	呼び径	X	Y
J C D A	6.35	12	12
	9.52	10	10
	12.7	12	12
	15.88	13	13
	19.05	15	15
	22.22	18	18
	25.4	20	20
	28.58	22	22
	31.75	23	23
	34.92	27	27
	38.1	27	27
	41.28	32	32
	44.45	31	31
	50.8	44	44
	53.98	37	37

異径 T

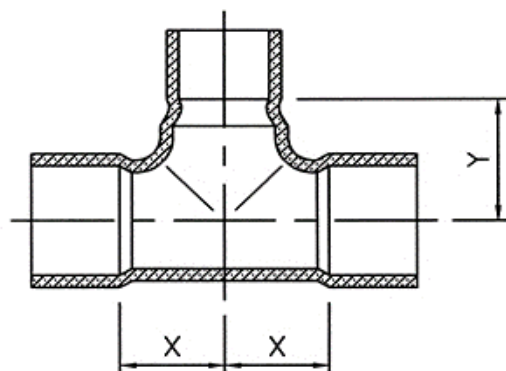

規格	呼び径	X	Y
J C D A	9.52 x 6.35	10	12
	12.7 x 6.35	12	15
	12.7 x 9.52	12	12
	15.88 x 6.35	13	20
	15.88 x 9.52	13	16
	15.88 x 12.7	13	16
	19.05 x 9.52	15	23
	19.05 x 12.7	15	22
	22.22 x 12.7	18	27
	22.22 x 15.88	18	24
	25.4 x 12.7	20	31
	25.4 x 15.88	20	28
	25.4 x 19.05	20	24
	31.75 x 19.05	23	32