

■ 建築用継手 製品一覧



T



90°エルボ



45°エルボ



ソケット



ユニオン



給水栓用エルボ



座付水栓エルボ



耳付水栓エルボ



フィッティングレジューサ



キャップ



おねじ付アダプタ



めねじ付アダプタ



青銅おねじ付アダプタ



青銅めねじ付アダプタ



おねじ付ユニオン



めねじ付ユニオン



絶縁ユニオン



青銅絶縁ユニオン




絶縁セットフランジ



NCフランジ

45° エルボ A


(単位mm)

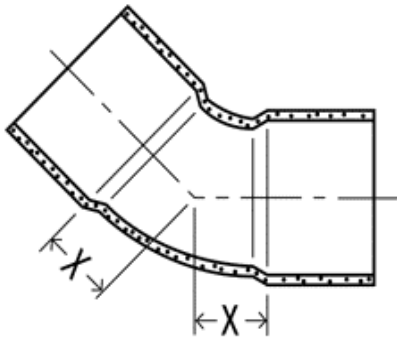

規格	呼び径	X
J I S	1/4	5
	3/8	6.5
	1/2	8
	5/8	8
	3/4	10
	1	12
	1.1/4	13
	1.1/2	20
	2	27
	2.1/2	43
	3	46
T F	4	57
	5	37
	6	70


45° エルボ B

(単位mm)

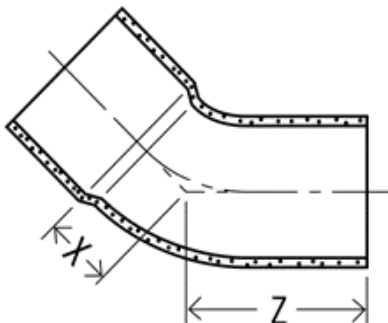

規格	呼び径	X	Z
J I S	1/4	5.5	14.5
	3/8	6.5	16.5
	1/2	8	20
	5/8	8	24
	3/4	10	28
	1	12	34
	1.1/4	13	38
	1.1/2	20	48
	2	27	61
	2.1/2	43	81
T F	3	46	89

45° エルボ C

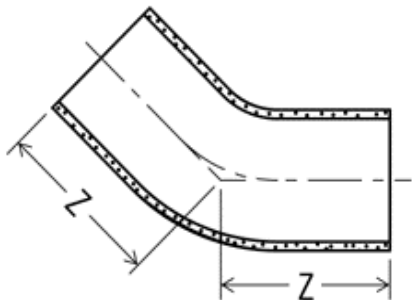

(単位mm)


規格	呼び径	Z
J I S	1/4	14.5
	3/8	16.5
	1/2	20
	5/8	24
	3/4	28
	1	34
	1.1/4	38
	1.1/2	48
	2	61

90° エルボ A

(単位mm)



規格	呼び径	X
J I S	1/4	11
	3/8	14
	1/2	15
	5/8	19
	3/4	22
	1	28
	1.1/4	33
	1.1/2	43
	2	45
	2.1/2	50
	3	58
T F	4	82
	5	114
	6	137

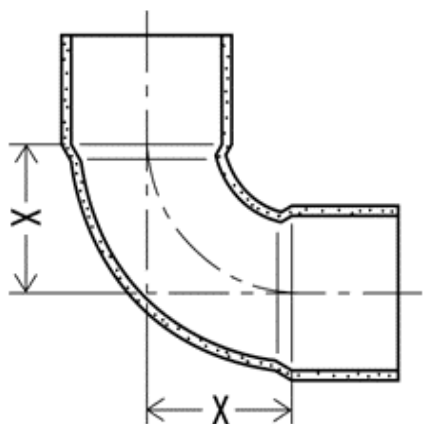


90° エルボ B


(単位mm)



規格	呼び径	X	Z
J I S	1/4	11	20
	3/8	14	25
	1/2	15	28
	5/8	19	36
	3/4	22	40
	1	28	50
	1.1/4	33	57
	1.1/2	43	71
	2	45	79
	2.1/2	50	87
T F	3	58	100

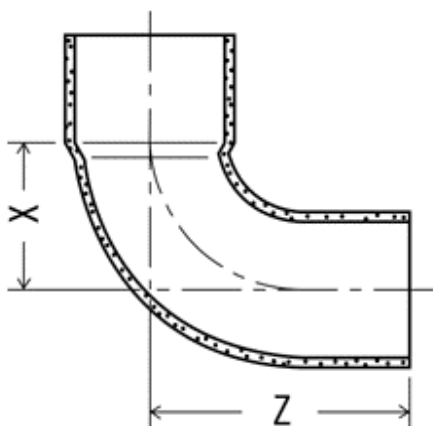


90° エルボC

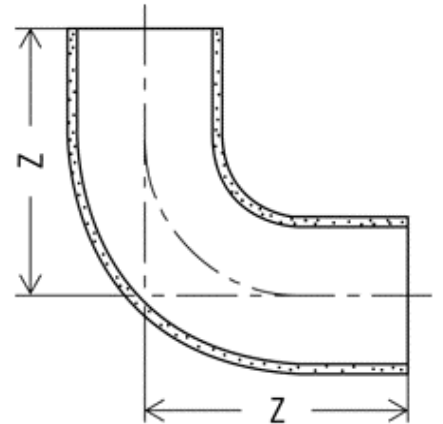

(単位mm)

規格	呼び径	Z
J I S	1/4	20
	3/8	25
	1/2	28
	5/8	36
	3/4	40
	1	50
	1.1/4	57
	1.1/2	71
	2	79

異径90° エルボA

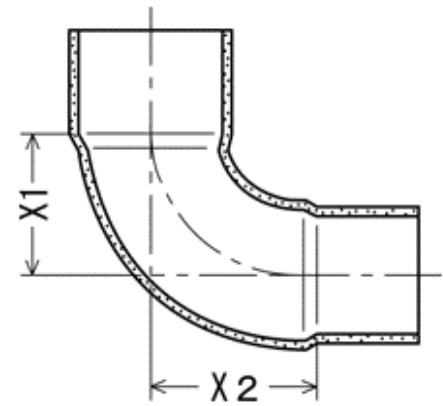

(単位mm)


規格	呼び径	X 1	X 2
T F	3/8 x 1/4	14	15
	1/2 x 1/4	15	19
J I S	1/2 x 3/8	15	18
	5/8 x 3/8	19	26
	5/8 x 1/2	19	23
	3/4 x 1/2	22	26
	3/4 x 5/8	22	23
T F	3/4 x 3/8	22	28
J I S	1 x 1/2	28	40
	1 x 5/8	28	35
	1 x 3/4	28	33
T F	1.1/4 x 1/2	33	49
	1.1/4 x 3/4	33	40
	1.1/4 x 1	33	36
	1.1/2 x 1	43	49
	1.1/2 x 1.1/4	43	45

(単位mm)



規格	呼び径	Z	ねじの呼び
J C D A	1/4	13	R 1/4
	3/8	15	R 3/8
	1/2	19	R 1/2
	3/4	20	R 3/4
	1	23	R 1
	1.1/4	24	R 1.1/4
	1.1/2	25	R 1.1/2
	2	30	R 2
	2.1/2	33	R 2.1/2
	3	35	R 3
	4	46	R 4
T F	3/8 X 1/2	19	R 1/2
	1/2 X 3/8	16	R 3/8
	1/2 X 3/4	23	R 3/4
	3/4 X 1/2	19.5	R 1/2


平行ねじ3/8 X G1/2、1/2 X G1/2、1/2 X G3/4、3/4 X G1/2、3/4 X G3/4も製作しています。

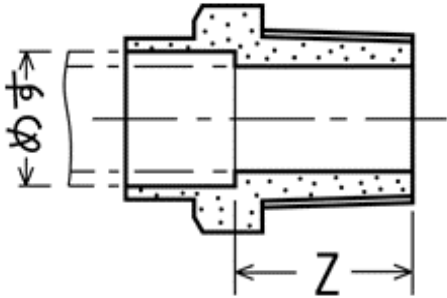

(単位mm)




規格	呼び径	Z	ねじの呼び
J C D A	1/4	17	R 1/4
	3/8	19	R 3/8
	1/2	25	R 1/2
	3/4	27	R 3/4
	1	32	R 1
	1.1/4	35	R 1.1/4
	1.1/2	38	R 1.1/2
	2	42	R 2
TF	1/2 X 3/8	20	R 3/8

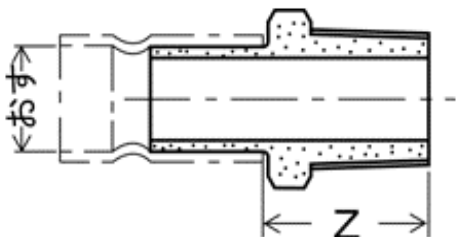

めねじ付アダプタA

RoHS

(単位mm)

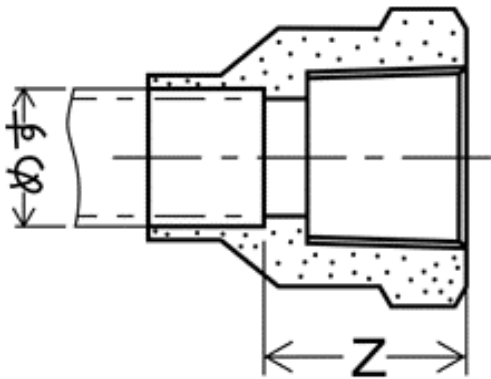

規格	呼び径	Z	ねじの呼び
J C D A	1/4	14	R c1/4
	3/8	15	R c3/8
	1/2	21	R c1/2
	3/4	24	R c3/4
	1	23	R c1
	1.1/4	26	R c1.1/4
	1.1/2	26	R c1.1/2
T F	2	32	R c2
	3/8 X 1/2	20	R c1/2
	1/2 X 3/8	13	R c3/8
	1/2 X 3/4	20	R c3/4
	3/4 X 1/2	18	R c1/2


注意) 六角は 1 以下のみです。

※切削品はZ=19
※切削品はZ=19

めねじ付アダプタB

RoHS

(単位mm)

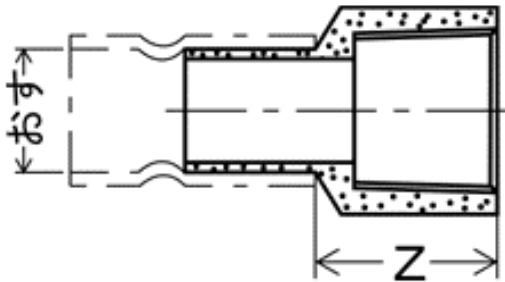

規格	呼び径	Z	ねじの呼び
J C D A	1/4	15	R c1/4
	3/8	17	R c3/8
	1/2	21	R c1/2
	3/4	24	R c3/4
	1	29	R c1
	1.1/4	32	R c1.1/4
	1.1/2	32	R c1.1/2
T F	2	37	R c2
	3/4 X 1/2	22	R c1/2


注意) Aタイプはろう付け側がめす、Bタイプはろう付け側がおすになります。

青銅おねじ付アダプタ

(単位mm)



規格	呼び径	Z	ねじの呼び
T F	1/2	18	R 1/2
	3/4	19.5	R 3/4
	22.22 X R 1/2	18	R 1/2
	1	23	R 1
	1.1/4	24	R 1.1/4
	1.1/2	25	R 1.1/2

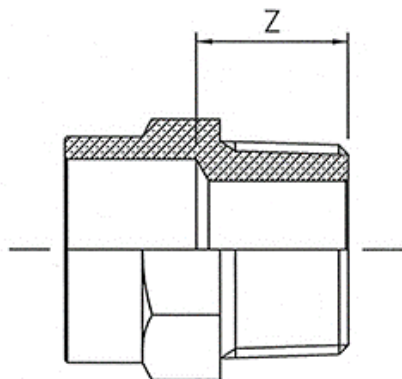


青銅めねじ付アダプタ


(単位mm)



規格	呼び径	Z	ねじの呼び
T F	1/2	17.5	R c1/2
	3/4	19	R c3/4
	22.22 X R c1/2	17.5	R c1/2

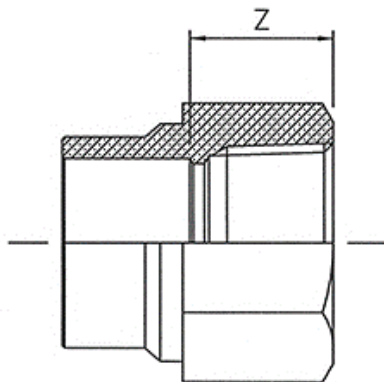

(単位mm)




規格	呼び径	G
J C D A	1/4	8
	3/8	9
	1/2	11
	5/8	15
	3/4	17
	1	21
	1.1/4	24
	1.1/2	27
	2	33
	2.1/2	37
T F	3	42
	4	54
	5	25
	6	30

給水栓用エルボ

(単位mm)




規格	呼び径	Z	X	ねじの呼び
T F	3/8	21.5	10	R c3/8
	1/2	30	19	R c1/2
	3/4	40	23	R c3/4
	3/4 X 1/2	32	19	R c1/2
	1	50	29	R c1

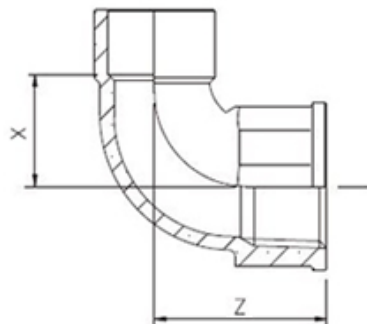

座付水栓エルボ




規格	呼び径	Z	X	ねじの呼び
T F	1/2	30	17	R c1/2

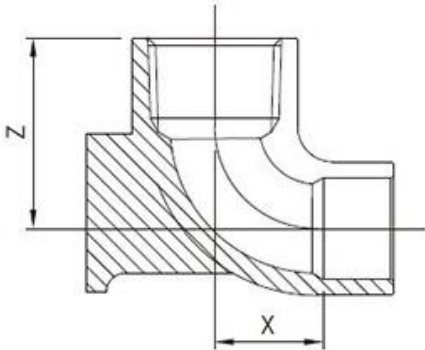


耳付水栓エルボ

(単位mm)

規格	呼び径	Z	X	ねじの呼び
T F	1/2	25	19	Rc1/2

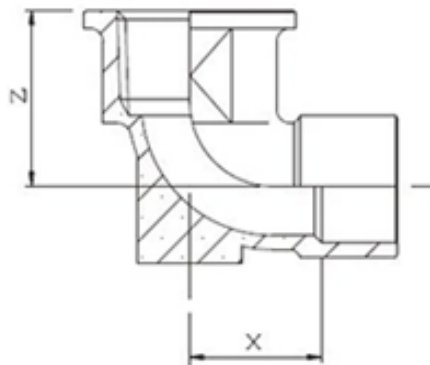

(単位mm)

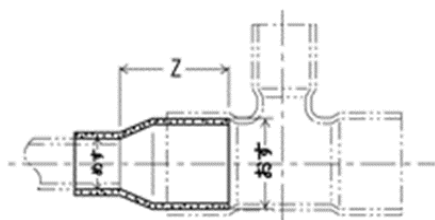


規格	呼び径	Z
J C D A	3/8 x 1/4	15
	1/2 x 3/8	19
	5/8 x 3/8	28
	5/8 x 1/2	25
	3/4 x 3/8	35
	3/4 x 1/2	32
	3/4 x 5/8	28
	1 x 1/2	38
	1 x 5/8	34
	1 x 3/4	31
	1.1/4 x 1/2	48
	1.1/4 x 5/8	44
	1.1/4 x 3/4	40
	1.1/4 x 1	36
	1.1/2 x 1/2	56
	1.1/2 x 5/8	50
	1.1/2 x 3/4	47
	1.1/2 x 1	43
	1.1/2 x 1.1/4	39
	2 x 1/2	69
	2 x 5/8	65
	2 x 3/4	62
	2 x 1	58
	2 x 1.1/4	55
	2 x 1.1/2	51
	2.1/2 x 1	73
	2.1/2 x 1.1/4	70
	2.1/2 x 1.1/2	66
	2.1/2 x 2	57
	3 x 1.1/4	82
	3 x 1.1/2	78
	3 x 2	69
	3 x 2.1/2	63
	4 x 2	98
	4 x 2.1/2	94
	4 x 3	88
T F	5 x 3	91
	5 x 4	60
	6 x 4	85
	6 x 5	71

絶縁ユニオン

(単位mm)




規格	呼び径	Z	ねじの呼び
T F	1/2	31	R c1/2
	3/4	36	R c3/4
	1	39	R c1
	1.1/4	44	R c1.1/4
	1.1/2	49	R c1.1/2
	2	53.5	R c2

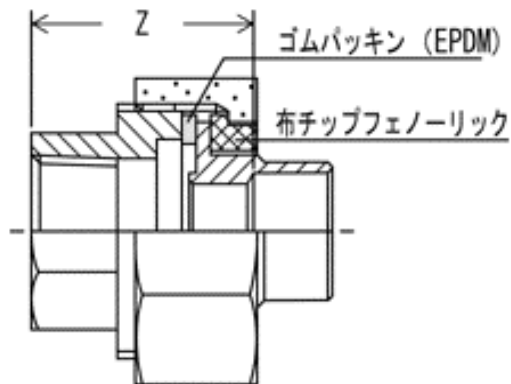

青銅絶縁ユニオン

(単位mm)

規格	呼び径	Z	ねじの呼び
T F	1/2	31	R c1/2
	3/4	36	R c3/4
	1	39	R c1

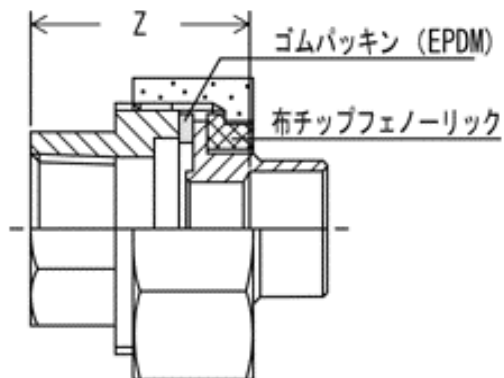

NCフランジ

呼び圧力5 K 用

(単位mm)

呼び径	D	H	G	E	C	A	I x ϕ J	ボルトサイズ*
1/2	80	29	11	39	60	9	4x11	M10
3/4	85	38	17	47	65	10	4x11	M10
1	95	43	21	56	75	10	4x11	M10
1.1/4	115	48	24	63	90	12	4x13.6	M12
1.1/2	120	57	27	75	95	12	4x13.6	M12
2	130	47	18	86	105	14	4x13.6	M12
2.1/2	155	54	20	101	130	14	4x13.6	M12
3	180	63	21	121	145	14	4x17.6	M16
4	200	66	22	141	165	16	8x17.6	M16
5	235	72	24	172	200	16	8x17.6	M16
6	265	78	26	202	230	18	8x17.6	M16

呼び圧力10 K 用


(単位mm)

呼び径	D	H	G	E	C	A	I x ϕ J	ボルトサイズ*
1/2	95	29	11	39	70	12	4x13.6	M12
3/4	100	38	17	47	75	14	4x13.6	M12
1	125	43	21	56	90	14	4x17.6	M16
1.1/4	135	48	24	63	100	16	4x17.6	M16
1.1/2	140	57	27	75	105	16	4x17.6	M16
2	155	47	18	94	120	16	4x17.6	M16
2.1/2	175	54	20	112	140	18	4x17.6	M16
3	185	63	21	125	150	18	8x17.6	M16
4	210	66	22	150	175	18	8x17.6	M16
5	250	72	24	180	210	20	8x21.6	M20
6	280	78	26	210	240	22	8x21.6	M20
8	330	80	33	262	290	22	12x21.6	M20

呼び圧力20 K 用


(単位mm)

呼び径	D	H	G	E	C	A	I x ϕ J	ボルトサイズ*
1/2	95	29	11	39	70	14	4x13.6	M12
3/4	100	38	17	47	75	16	4x13.6	M12
1	125	43	21	56	90	16	4x17.6	M16
1.1/4	135	48	24	63	100	18	4x17.6	M16
1.1/2	140	57	27	75	105	18	4x17.6	M16
2	155	47	18	94	120	18	8x17.6	M16
2.1/2	175	54	20	112	140	20	8x17.6	M16
3	200	63	21	125	160	22	8x21.6	M20
4	225	66	22	150	185	24	8x21.6	M20
5	270	72	24	180	225	26	8x23.6	M22
6	305	78	26	210	260	28	12x23.6	M22

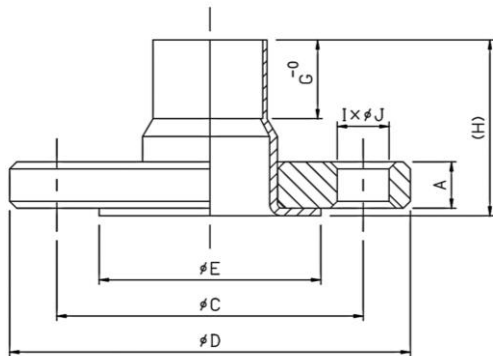

ソケット


(単位mm)

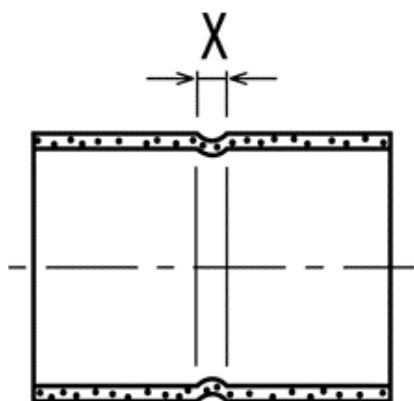

規格	呼び径	X
J C D A	1/4	1
	3/8	2
	1/2	2
	5/8	2
	3/4	2
	1	2
	1.1/4	2
	1.1/2	2
	2	3
	2.1/2	3
	3	4
	4	4
T F	5	10
	6	10

止めなしソケット


(単位mm)



規格	呼び径	L
T F	1/4	25
	3/8	30
	1/2	40
	3/4	58.5
	1	71
	1.1/4	75
	1.1/2	84
	2	103.5
	2.1/2	115.5
	3	132
	4	168
	6	200

異径ソケット

(単位mm)

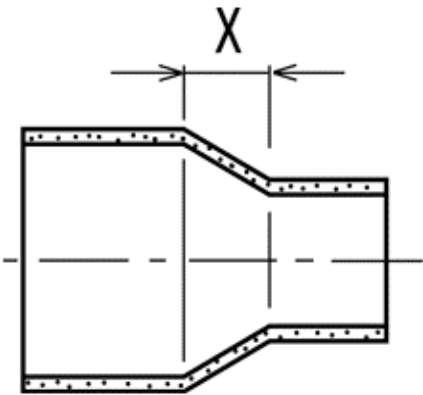

規格	呼び径	X
J C D A	3/8 x 1/4	4
	1/2 x 3/8	6
	5/8 x 3/8	11
	5/8 x 1/2	8
	3/4 x 3/8	13
	3/4 x 1/2	11
	3/4 x 5/8	7
	1 x 1/2	16
	1 x 5/8	12
	1 x 3/4	10
	1.1/4 x 1/2	21
	1.1/4 x 5/8	17
	1.1/4 x 3/4	14
	1.1/4 x 1	9
	1.1/2 x 1/2	26
	1.1/2 x 5/8	22
	1.1/2 x 3/4	20
	1.1/2 x 1	15
	1.1/2 x 1.1/4	11
	2 x 1/2	35
	2 x 5/8	31
	2 x 3/4	27
	2 x 1	23
	2 x 1.1/4	20
	2 x 1.1/2	16
	2.1/2 x 1	35
	2.1/2 x 1.1/4	31
	2.1/2 x 1.1/2	26
	2.1/2 x 2	17
	3 x 1.1/4	41
	3 x 1.1/2	35
	3 x 2	27
	3 x 2.1/2	22
	4 x 2	41
	4 x 2.1/2	35
	4 x 3	30
T F	5 x 3	64
	5 x 4	33
	6 x 3	55
	6 x 4	55
	6 x 5	40


T

RoHS

RoHS

は、RoHS指令対応品です。


(単位mm)

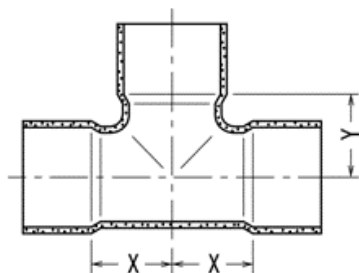

異径 T



規格	呼び径	X	Y
J I S	1/4	10	10
	3/8	12	12
	1/2	13	13
	5/8	15	15
	3/4	18	18
	1	22	22
	1.1/4	27	27
	1.1/2	32	32
	2	37	37
	2.1/2	48	48
	3	56	56
	4	76	76
T F	5	80	80
	6	130	98
J I S	3/8 x 1/4	12	12
	1/2 x 3/8	13	16
	5/8 x 3/8	15	22
	5/8 x 1/2	15	19
	3/4 x 3/8	18	27
	3/4 x 1/2	18	24
	3/4 x 5/8	18	20
	1 x 1/2	22	33
	1 x 5/8	22	29
	1 x 3/4	22	26
T F	1 x 3/8	22	36
	1.1/4 x 3/8	27	42

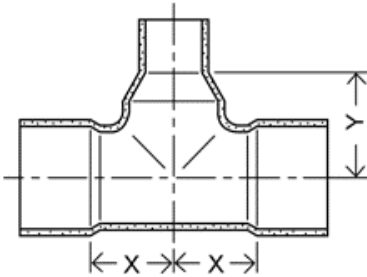

J I S	1.1/4 x 1/2	27	42
	1.1/4 x 5/8	27	38
	1.1/4 x 3/4	27	35
	1.1/4 x 1	27	30
	1.1/2 x 1/2	32	51
	1.1/2 x 5/8	32	47
	1.1/2 x 3/4	32	45
	1.1/2 x 1	32	40
	1.1/2 x 1.1/4	32	35
	2 x 1/2	37	67
	2 x 5/8	37	63
	2 x 3/4	37	60
	2 x 1	37	55
	2 x 1.1/4	37	50
	2 x 1.1/2	37	46
	2.1/2 x 1	48	74
	2.1/2 x 1.1/4	48	70
	2.1/2 x 1.1/2	48	66
	2.1/2 x 2	48	58
	3 x 1.1/4	56	85
	3 x 1.1/2	56	81
	3 x 2	56	72
	3 x 2.1/2	56	64
T F	4 x 2	76	106
	4 x 2.1/2	76	98
	4 x 3	76	93
	5 x 3	80	106
	5 x 4	80	90
	6 x 4	130	98
	6 x 5	130	98

RoHS指令：電子・電気機器における特定有害10物質の使用制限についての
欧州連合（E U）による指令。


有害10物質：カドミウム、六価クロム、鉛、水銀およびその化合物、
PBB、PBDE、DEHP、BBP、DBP、DIBP

ユニオン

(単位mm)



規格	呼び径	X
J C D A	1/4	16
	3/8	17
	1/2	17.5
	5/8	19
	3/4	25
	1	27.5
	1.1/4	32
	1.1/2	34
	2	40

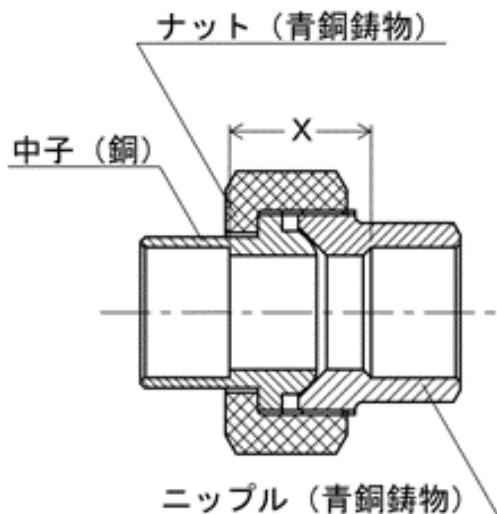


おねじ付ユニオン

(単位mm)



規格	呼び径	Z	ねじの呼び
T F	1/2	40	R 1/2
	3/4	50	R 3/4
	1	55.5	R 1
	1.1/4	64	R1.1/4

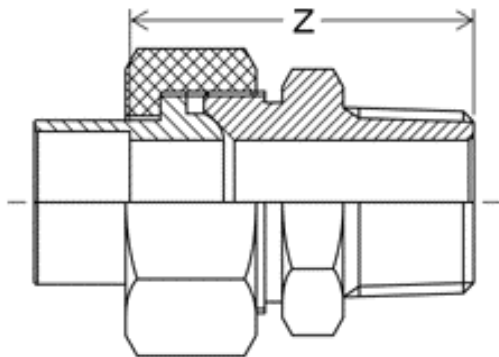

めねじ付ユニオン

(単位mm)



規格	呼び径	Z	ねじの呼び
T F	1/2	36	Rc1/2
	3/4	45	Rc3/4
	1	49.5	Rc1

